


PERSONAL TRACKER

TLP1-P is a simple but powerful personal tracking device for wide ranging applications

LTE & GSM TLP1-P 4G

LTE Cat-M1(eMTC)/Cat-NB1(NB-IoT) and GSM assets tracking devices for wide ranging applications



	200g		69.3*119*23.2 mm
	-20°C~+60°C		Rechargeable Li-Polymer 4800 mAh/3.7V

-  Compact Size
-  Waterproof
-  Firmware Over the Air
-  Scheduled Timing Report
-  Motion Detection
-  Low Battery Alarm
-  Removal Alert
-  Data Security (MD5/AES)
-  SOS Emergency Button
-  MQTT Support

Standby Time

(2 hours active tracking per day)

10 Min Reporting		170 Days
5 Min Reporting		90 Days
1 Min Reporting		35 Days


Outdoor



Children Tracking



Luggage Tracking

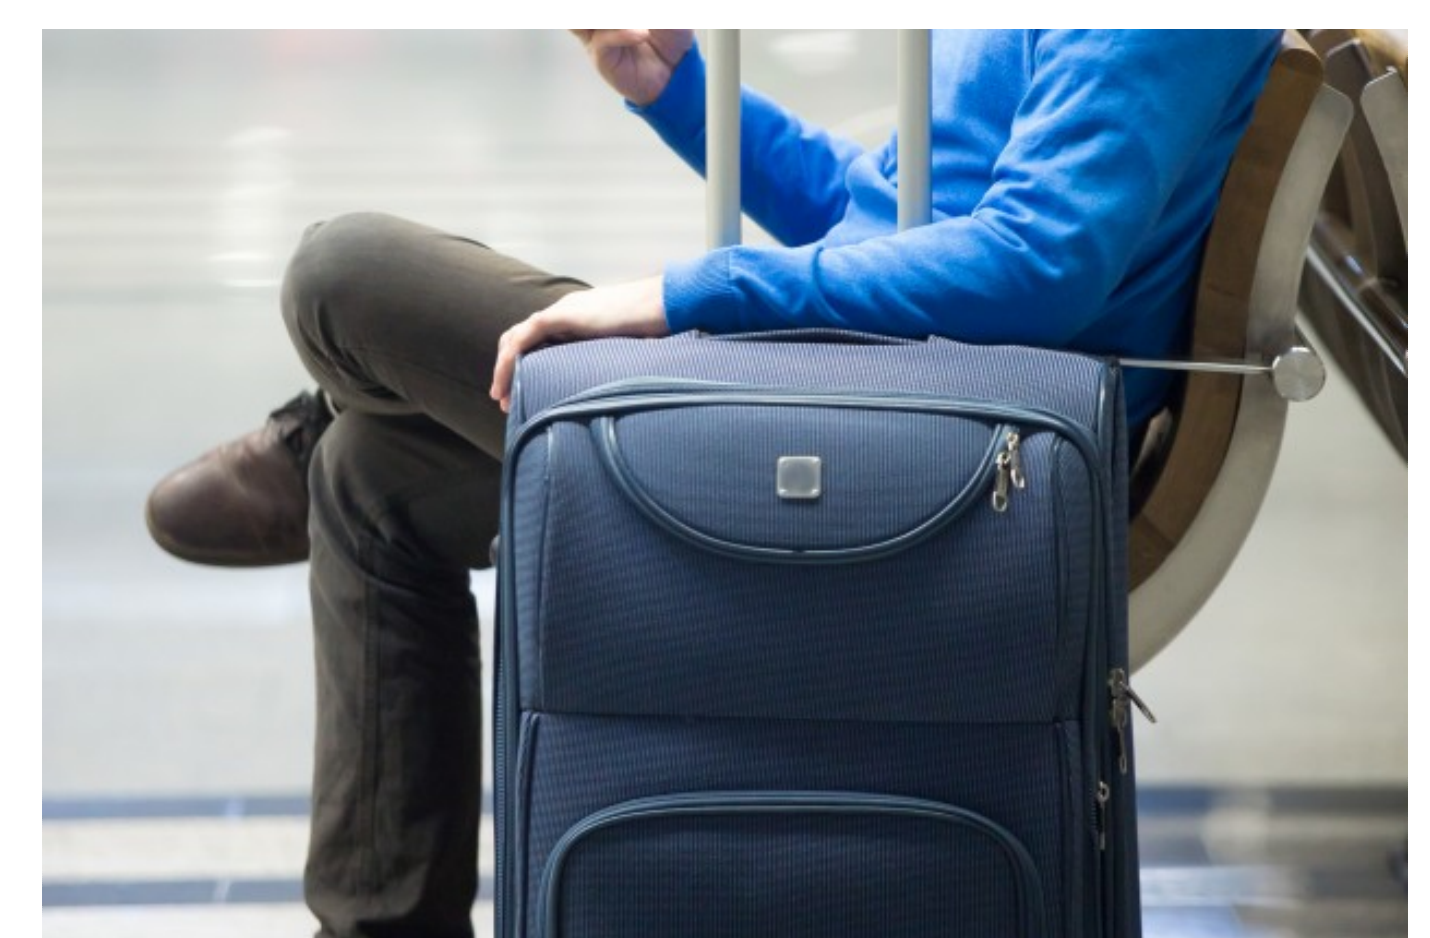

LTE TLP1-P SPEC

Network/Operating Band	
Operating Band	FDD: B1/B2/B3/B4/B5/B8/B12/B13/B17/B18/B19/B20/B25/B28 TDD: B39 (Cat M1 only) EGPRS 850/900/1800/1900MHz
Data Transmission	eMTC: Max. 300Kbps (DL), Max. 375Kbps (UL) NB1: Max. 32Kbps (DL), Max. 70Kbps (UL) EDGE: Max. 296Kbps (DL), Max. 236.8Kbps (UL) GPRS: Max. 107Kbps (DL), Max. 85.6Kbps (UL)
GNSS Specifications	
GNSS Chipset	Qualcomm Gen 8C GNSS receiver
Parallel GNSS	GPS+Glonass+Galileo+Beidou
Receiver Type	33 tracking / 99 acquisitions- channel GNSS receiver
Sensitivity	Cold start: -149 dBm Tracking: -163 dBm
Position Accuracy (CEP)	Autonomous < 2m
Standalone TTFF	Cold start: < 29s Warm start: < 27s Hot start: < 1s
Interfaces	
Charging and Data Transmission	4 Pin port with magnet
Network, GNSS Antenna	Internal only
Indicator LED	Network, GNSS and Battery level
FOTA	Yes
Physical Power Switch	1
Light Sensor	2 light sensors (front and back)
Temperature Sensor	1 temperature sensor
General Specifications	
Waterproof	IP66
Dimensions	69.3mm*119mm*23.2mm
Weight	200g
Battery	Rechargeable Li-Polymer 4800 mAh/ 3.7V
Standby Time (2 hours active tracking per day)	10 minutes reporting: 170 days 5 minutes reporting: 90 Days 1-minute reporting: 35 Days
Charging & Data Communication	Magnetic USB cable (recommend using 5V 1A adaptor, 10 hours charging)
Operating Temperature	-20°C ~ +60°C (-4°F ~ 140°F)
Air Interface Protocol	
Transmit Protocol	TCP, UDP, MQTT, SMS
Protocol Check & Encryption Support	MD5/ AES256
Scheduled Timing Report	Report position and status at preset intervals
Geo-fence	Support up to 64 internal geo-fence regions
Low Power Alarm	Sending alarm when battery is low
SOS/Emergency Alarm	SOS alarm via pressing function button
Motion Detection	Motion alarm based on internal 3-axis accelerometer